



Steel-Line

Roller Door Opener **RD1200**

Despite being compact in size it is packed full of features as well as being super quiet.

simply safer



Heavy duty motor (1,200N) designed for cyclone regions for doors up to 18m²



Door Types: Residential Roller Doors

Door Size: Up to 25m²

(18m² for wind locked doors)

Key Benefits



Quality Tested

Proven technology coupled with robust design backed up by rigorous quality testing.



2 Year Warranty

2 year motor warranty, 2 year electronics warranty.



Motor

Powerful DC motor which means reduced noise and vibration on opening and closing.



Soft Start/Stop Function

Ensure smooth and quiet door operation which is important when the garage is located close to bedrooms or living areas.



LED Courtesy Light

A convenient way to navigate through your garage environment and get in and out of your car (operates for 2 minutes).



Transmitter Range

Remote distance: Effective operating range of up to 35m.



Link Technology

Compatible with RD800, SD800 and SD1200.

Standard Safety Features



Auto Safety Reverse

If an obstruction occurs during closing of the door this function causes the garage door to immediately stop and reverse direction upon contact with the obstruction.



Manual Release


In case of power failure you can simply activate the manual release to open your garage door.



Inbuilt Safety Timer

If optional photo eye beams are installed, the automatic closer timer will ensure that your door will close automatically if you forget to close it yourself. This is a fantastic security feature that will provide security and peace of mind.

Call 1300 427 243 | steel-line.com.au

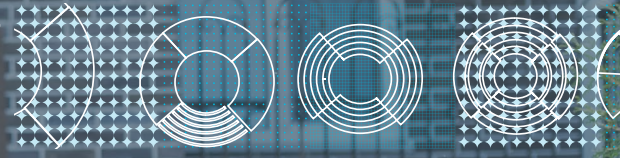

RD1200 Roller Door Opener




Heavy duty motor (1,200N) designed for cyclone regions for doors up to 18m²

Kit Components



1 x Powerhead, 2 x Three Channel Key Ring Transmitters, 1 x Wireless Wall Transmitter, 1 x Weight Bar

Typical Installation

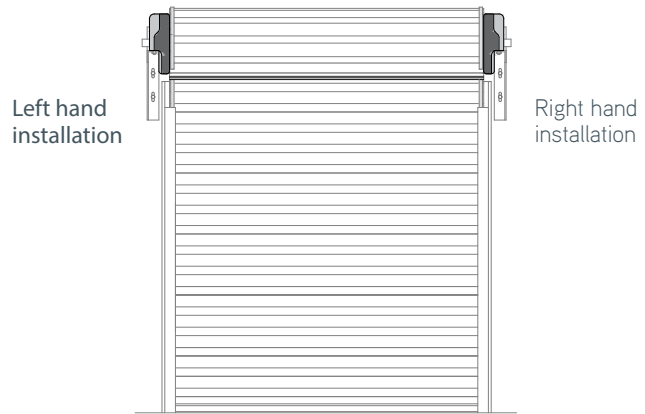

Max Door Height: 5.5m

Specifications

- 24V DC motor type
- Rated door area up to 25m² (18m² for wind rated doors)
- Max door curtain weight: 250kg
- 433.92 MHz transmitter frequency
- Max driving force: 1200N
- Minimum side room of 90mm STD / 115mm WINDCLIP (edge of curtain to wall)
- Electrical Input: 240V, 50Hz
- Max door height: 5.5m
- Courtesy LED light included
- Manual disengagement system
- Electronic limit system




Push & pull force: 1200N
 Door travel speed: Max. 130mm/s
 Opening time: Approx 21 sec (door specific)

Direct Clamping Method

Minimum distance from edge of curtain to edge of door bracket


45mm STD / 75mm WINDCLIP



Standard Installation

Door Type	Max Door Size	Min Side Room (Edge Curtain to Wall)	Min Side Room (Edge Curtain to Edge of Bracket)
Non wind-locked	25m ²	90mm	45mm
Wind rated	18m ²	115mm	75mm

Optional Accessories



'Photo Eye' Technology

Allows the garage door to automatically reverse when its sensory light beam is broken by an obstruction, helping to protect your family from injury and your car from damage caused by contact.



Emergency Key Release

Used in case of malfunction or power failure, especially useful if there is no other access to the garage.



Electronic Key Switch

Allows entry into your garage from outside, via a key lock. Useful when remote handset is not available.



Extra Remote Transmitters

A must for every set of keys in the household. The RD1200 memory register will hold up to 15 handset codes.



Wireless Keypad

Weatherproof digital keypad which can be programmed with 4 digit pin code, for maximum security. Includes back-light when used in poor lighting conditions.